


AKIM - GERİLİM DÖNÜŞTÜRÜCÜ CURRENT-VOLTAGE CONVERTER

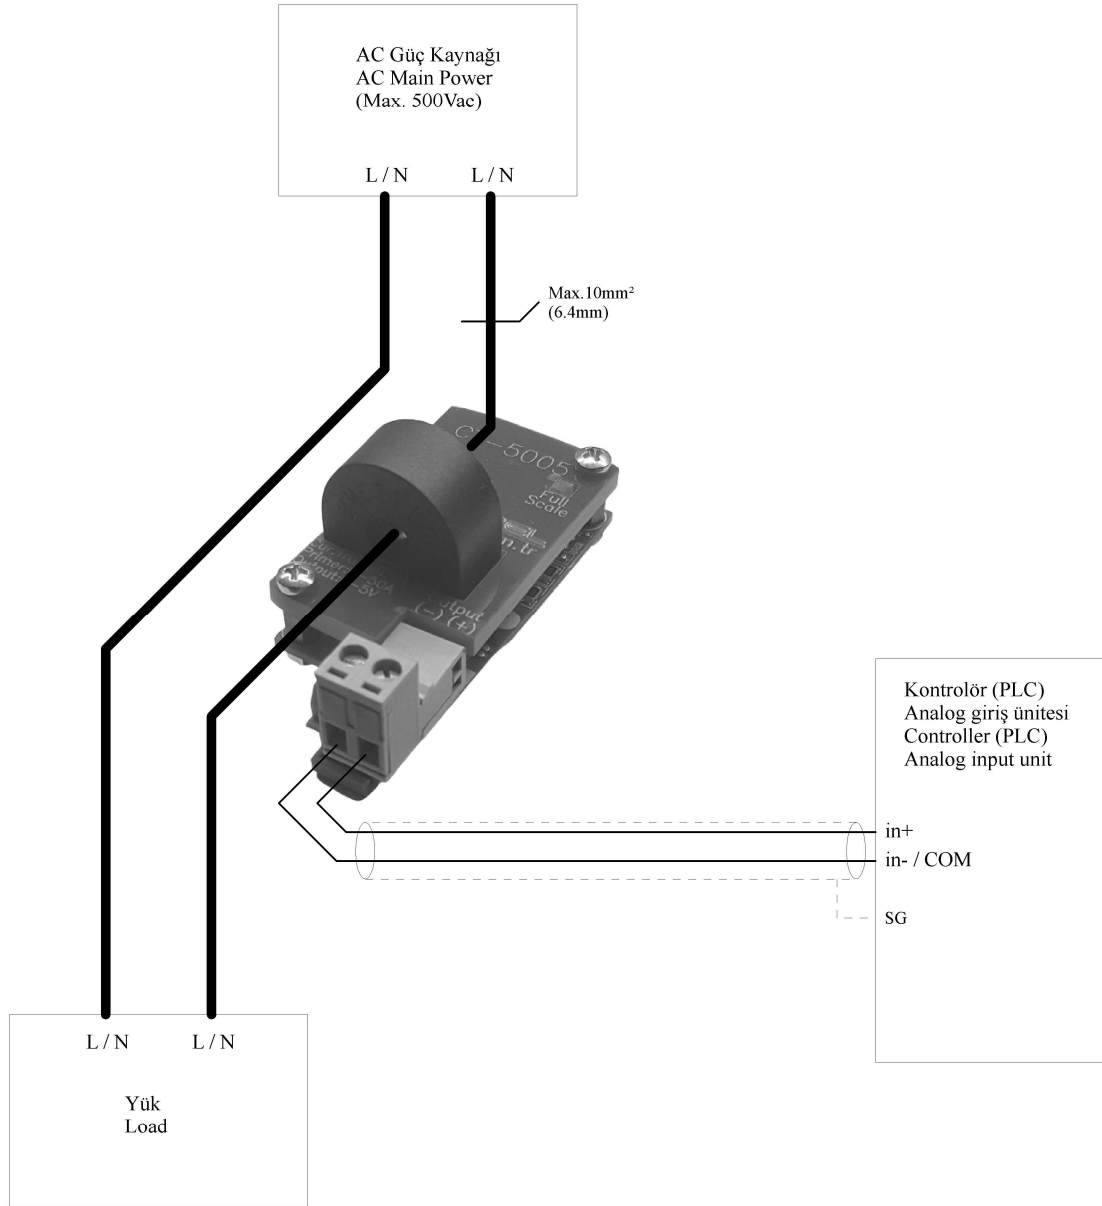

Teknik Özellikler

Ürün Kodu	: CT5005
Çalışma Gerilimi	: Gerekli değil
Ölçme Kapasitesi	: 0 - 50A (ac)
Primer gerilim sınırı	: 500Vac (~1.500Vpp)
Çıkış	: 0 - 5V (dc)
Çıkış akımı	: 1mA max. (*)
Ölçüler	: 68x30+44(mm)
Koruma sınıfı	: IP20
Montaj	: DIN Ray
Bağlantı	: Akım ölçümü - Direkt geçiş (10mm ² /Ø:6.4mm) Çıkış - Geçmeli klemens

(*) : CT5005 primerden geçem akımı takip ederek çıkışında bunun ile orantılı gerilim üretir. Çıkışından çekilecek akıma göre bu değer değişiklik gösterebilir. Bu nedenle hassas ölçüm için kullanımı tavsiye edilemez.

Technical Features

Product code	: CT5005
Supply	: No need
Measuring scale	: 0 - 50A (ac)
Primary voltage limit	: 500Vac
Output	: 0 - 5V (dc)
Output Current	: 1mA max. (*)
Dimensions	: 68x30+44(mm)
Protection class	: IP20
Fixing	: DIN Rail
Connection	: Main wire - Direct cross (up to 10mm ² / Ø:6.4mm) Output - socket connector

(*) : CT5005 follows the current through the primary and produces a voltage proportional to it at its output. This value may vary according to the current to be drawn from its output. Therefore, its use for precision measurement cannot be recommended.

Title **CT_sema_kull_klav_R0.SchDoc**

Aspel San.Tic.Ltd.
Ferhatpasa Mah.
Atasehir
ISTANBUL
TR



Size: A4

Number:*

Revision:R0

Date : 20.11.2022

Sheetn of m

Drawn : MEP